


# G Series Two & Three-Phase 60 Amp Solid State Power Controller



- SCR output, two and three-phase panel mount solid-state relay Power Controller
- Output ratings up-to 60 amps per-phase @ 40°C ambient temperature
- Thermally efficient heat sink to maximize overall product life expectancy
- Direct-bond copper (DBC) substrate for superior thermal performance
- Epoxy free design eliminates stress on internal components due to epoxy expansion and contraction
- MTBF > 7 million hours (>800 years)
- Touch-safe cover
- Solid-state relay approvals include VDE/TÜV and CE

## Nomenclature Series

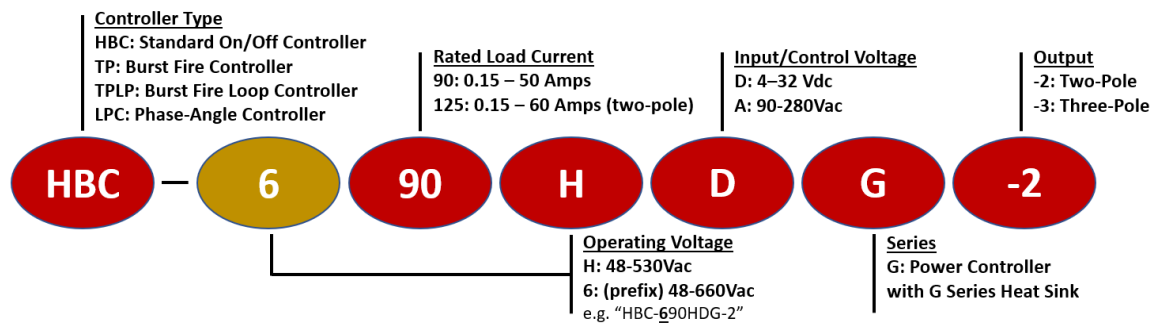

## Output Specifications

Part Number: HBC-	90HxG-2	690HxG-2	125HxG-2	6125HxG-2	90HxG-3	690HxG-3	125HxG-3	6125HxG-3
Crydom Solid-State Relay Utilized*	Hx4890	Hx6090	Hx48125	Hx60125	Hx4890	Hx6090	Hx48125	Hx60125
Operating Voltage (Vrms; 47-440Hz)	48-530	48-660	48-530	48-660	48-530	48-660	48-530	48-660
Load Current Range (Amps RMS Per-Phase)	.15 - 50	.15 - 50	.15 - 60	.15 - 60	.15 - 50	.15 - 50	.15 - 50	.15 - 50
Transient Overvoltage (Vpk)	1200	1200	1200	1200	1200	1200	1200	1200
Max. Surge Current (Apk; 50/60Hz)	1145 /1200	1145 /1200	1670 /1750	1670 /1750	1145 /1200	1145 /1200	1670 /1750	1670 /1750
Max. On-State Voltage Drop (Vrms)	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Max I <sup>2</sup> T for Fusing (A <sup>2</sup> S; 50/60Hz)	6560 /5976	6560 /5976	13950 /12709	13950 /12709	6560 /5976	6560 /5976	13950 /12709	13950 /12709
Max. Off-State Leakage Current (mArms)	1	1	1	1	1	1	1	1
Min. Power Factor with Max. Load	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

\*UL Recognized Components - E116949 or E116950 ("x" refers to either "A" (AC input) or "D" (DC input) SSR)



# G Series Two & Three-Phase 60 Amp Solid State Power Controller

## Input Specifications

Part Number:	HBC-xxDG-x	HBC-xxAG-x
Control Voltage Range	4-32Vdc	90-280Vac
Minimum Turn-On Voltage	4Vdc	90Vac
Must Turn-Off Voltage	1Vdc	10Vrms
Input Current Range (mA)	7 - 12	5 - 10
Nominal Input Impedance	Current Regulated	
Maximum Turn-On / Turn-Off Time (msec)	½ AC Cycle	20 / 30

## General Specifications

Description	Specification
Dielectric Strength (Input/Output/Heat Sink)	4,000 Vrms
Ambient Operating Temperature Range	-40 to +80 °C
Weight	3.7 lbs (1.7 kg) (-2) / 3.9 lbs (1.8 kg) (-3)
Solid State Relay Housing Material	UL94 V-0 Polymers
Heat Sink Material	Aluminum
Input Terminal Screw Torque Range (in-lb/Nm)	13-15 / 1.5-1.7
Load Terminal Screw Torque Range (in-lb/Nm)	18-20 / 2.0-2.2
MTBF (Mean Time Between Failures) @ 40°C ambient	~11 Million Hours (>1,300 years)
MTBF (Mean Time Between Failures) @ 60°C ambient	~7 Million Hours (>800 years)

## Available Options

- 10 Random/Instantaneous turn-on (inductive or phase-control applications)
- M MOV (metal oxide varistor) overvoltage protection
- P Internal TVS overvoltage protection
- Z LED input status indicator
- E 24Vac control voltage (AC input only)
- ND Without DIN rail clip
- CT Current transducer
- WH Wiring harness for multiple pole configurations

## Input Options (Change HBC- prefix to TP, TPLP or LPC prefix)

- TP** Burst fire (time proportioning) controller. Analog Input; 0-10Vdc, 0-5Vdc, 2-10Vdc, 1-5Vdc, 4-20mA, potentiometer or 0-135Ω rheostat (TP135 prefix). 24Vac power supply required (optional HBCcontrols PS series if 24Vac supply is not available)
- TPLP** Burst fire loop (time proportioning loop) controller. Analog Input; 4-20mA (24Vac supply not required)
- LPC** Linear phase-angle controller. Analog Input; 0-10Vdc, 0-5Vdc, 2-10Vdc, 1-5Vdc, 4-20mA, potentiometer or 0-135Ω rheostat (LPC135 prefix). 24Vac power supply required (optional HBCcontrols PS series if 24Vac supply is not available)

# G Series Two & Three-Phase 60 Amp Solid State Power Controller

